

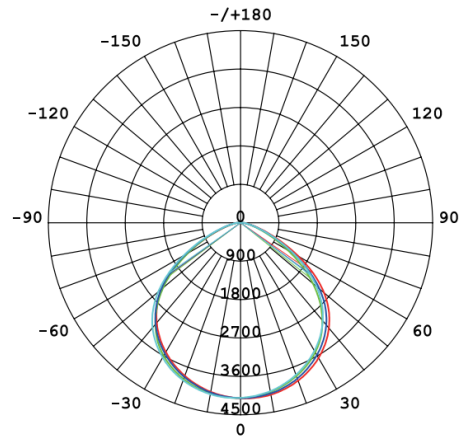
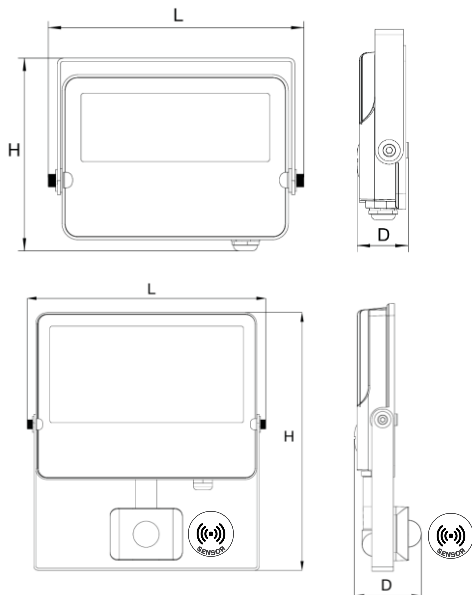
Features

- High efficiency: up to 120Lm/W
- Multi-Watt and Tri-Colour selectable
- Ratings: IP65 and IK08
- Available with or without PIR sensor
- Material: Tempered Glass (Diffuser), Die-Cast Aluminium (Body)
- Lifetime (L70B50): 50,000 hrs
- 1.0m flex cable





Applications

- Residential areas, backyards, pathways, commercial areas



Product Data

Order Code	Wattage	Colour Temperature	Lumen Output	Dimensions (LxHxD)	Weight
271005	30/20/10W	3000/4000/5000K	3600/2400/1200Lm	145x105x38mm	0.67kg
271005S 	30/20/10W	3000/4000/5000K	3600/2400/1200Lm	145x105x38mm	0.74kg
271006	50/30/20W	3000/4000/5000K	6000/3600/2400Lm	195x147x40mm	1.04kg
271006S 	50/30/20W	3000/4000/5000K	6000/3600/2400Lm	195x147x40mm	1.09kg

- [1] Voltage: 220~240V
- [2] Operating Frequency: 50/60Hz
- [3] Operating Temperature: -30 to +45°
- [4] Beam Angle: 110°
- [5] Power Factor: 0.9